
## Bush Hog TOUGH Backhoes

## **BUSH HOG® TOUGH FEATURES**

TOUGH High Quality Cylinders
TOUGH Box Construction Of Dipperstick
TOUGH Heavy Duty Booms
TOUGH Popotic Wolds With Consistent

**TOUGH Robotic Welds With Consistent Penetration** 

TOUGH Reinforced Buckets
TOUGH 2 1/2 Inch Welded Cutting Edges
TOUGH Powder Coat Paint

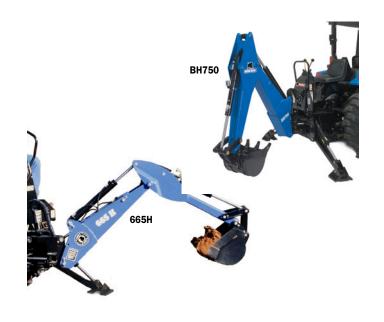

MODELS	665H	BH750	
Tractor HP Range	15 - 35 PTO	25 - 50 PTO	
Maximum Digging Depth	7 ft 0 inches	8 ft 0 inches	
Digging Depth (two foot flat bottom)	6 ft 6 inches	7 ft 6 inches	
Swing Arc	180°	180°	
Loading Height (bucket at 60°)	5 ft 0 inches	5 ft 4 inches	
Reach From Center Line of Swing Pivot	8 ft 6 inches	10 ft 0 inches	
Transport Height (maximum)	4 ft 11 inches	6 ft 7 inches	
Bucket Rotation	180°	180°	
Loading Reach (bucket at 60°)	3 ft 2 inches	3 ft 9 inches	
Transport Overhang	3 ft 5 inches	3 ft 9 inches	
Undercut	2 ft 4 inches	2 ft 9 inches	
Stabilizer Spread (down position)	6 ft 6 inches	7 ft 2 inches	
Stabilizer Spread (up position)	3 ft 11 inches	3 ft 7 inches	
Bucket Cylinder Digging Force	2450 lbs	3380 lbs	
Dipperstick Cylinder Digging Force	1250 lbs	2240 lbs	
Craning Force (boom lift ability)	346 lbs	675 lbs	
Angle of departure (subframe mounted)	18°	18°	
Shipping Weight (less bucket)	654 lbs	1085 lbs	
Hydraulic Volume Requirements	4 to 5 GPM	8 GPM	
Hydraulic Pressure Requirements	2250 PSI	2400 PSI	
Reinforced Buckets (regular duty & commercial grade buckets)	Yes	Yes	
Buckets	9 to 24 inches both regular and heavy duty	9 to 24 inches both regular and commercial grade 36 inch regular duty only	
Removable Bucket Teeth (regular duty & commercial grade buckets)	Replaceable Tooth Tips regular duty buckets (removeable on heavy duty)	Yes	
Options	PTO Pump/Reservoir Kit Power Beyond Kit	PTO Pump/Reservoir Kit Power Beyond Kit, Closed Center Hydraulic Kit, Street Pad Kit, Flow Divider Kit	
Wannanta		4 limite al	

Warranty

1 year limited warranty